


BLANKE BASEMAX



2 3

EASY LEVELLING - FROM 5 TO 100 MM!

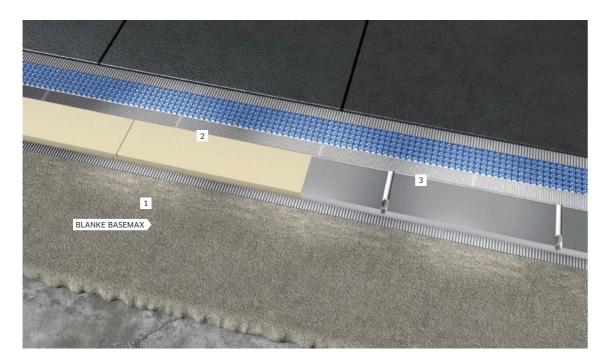

1 BLANKE BASEMAX 2 BLANKE PERMATFLOOR 3 BLANKE PERMATOP

LEVEL SURFACES - FAST AND EASY

- > Low static load due to light weight only about 25% the weight of conventional screed
- > Economical through a high proportion of light materials
- > Two-component system creates a permanent, fixed adhesion
- > High time savings quick drying and installation ready after 12 hours
- > Levels surfaces from just 5 mm up to 100 mm

BLANKE BASEMAX consists of a light filler in the form of expanded glass granulate and a cement-based bonding agent. Mixing with water creates the easy levelling from the two components which binds with the uneven surfaces – no matter whether concrete, screed, chipboard or wood flooring – it can be levelled from just 5 mm right up to 100 mm. BLANKE BASEMAX distinguishes itself through its extreme low weight properties, which only accounts to 25% of a comparable conventional screed. After just 12 hours, BLANKE BASEMAX is set and the Blanke flooring systems can be directly bonded and installed.



■ Easy incorporation of pipes and cables



■ Before starting, lay out tools and material



Priming



Application of the mixed adhesion bridge



■ Spread the mixed BLANKE BASEMAX wet in wet



■ Compress and trowel up



■ Smooth. Ready for installation after 12 hours

TECHNICAL DATA

Water needed:

Mixing ratio: 1 part by weight: 1 part by weight,

Comp. A bonding agent, comp. B filler,

1 bag comp. A 25 kg, 2 bags comp. B 12.5 kg approx. 35 % = 8.75 l water per 25 kg bonding agent

Layer thickness: min 5 mm - max. 100 mm

Working time: approx. 60 min.
Accessible: approx. 12 hrs
Ready for laying: approx. 12 hrs

Consumption: approx.a. 4.8 kg/m² per cm thickness, ready mix comp. A+B

Storage life: approx. 6 months

For more information, please refer to the technical data sheet and laying instructions.



Consulting and Sales:

Blanke GmbH & Co. KG

Stenglingser Weg 68-76 58642 Iserlohn/Germany

T +49 (0)2374 507-0

F +49 (0)2374 507-4230

E info@blanke-systems.de

I www.blanke-systems.de







