




FÜR HANDWERK, DAS ÜBERZEUGT.

## TECHNICAL DATA SHEET

### BLANKE DEKOPROFIL

For the decorative accent between tiles

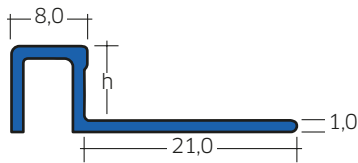

#### Technical Data

Material: Aluminium natural  
Aluminium satin silver anodized  
Length: 2,50 und 3,00 m  
Height: 6,0 / 8,0 / 10,0 / 12,5 / 15,0 mm

Material: Brass  
Brass chrome plated  
Length: 2,50 m  
Height: 9,0 / 11,0 / 12,5 / 15,0 mm

#### Characteristics

- > Decorative
- > High protection
- > High quality design

#### Description

BLANKE DEKOPROFIL is for the decorative accent between tiles. It also serves as a aesthetic and protective border. Our BLANKE DEKOPROFIL not only guarantees a decorative effect but also a protection from mechanical damages on the border zones. The visible part of the Blanke•Dekoprofil has a width of 8 mm and its lateral height depends on that of the ceramic tile.

#### Application area

The BLANKE DEKOPROFIL floor accent profile made of extruded stainless steel provides decorative accents between tiles. BLANKE DEKOPROFIL is highly mechanically resistant and thus perfect for applications that depend on a high mechanical stability. BLANKE DEKOPROFIL is produced of many different types of material. The chemical, mechanical or any other stresses on the corresponding profile type to be expected need to be determined in each individual case.

#### Working instructions

Choose the BLANKE DEKOPROFIL according to the height of the tile. Put tile adhesive on the wall with the help of a trowel exactly where you want to install the BLANKE DEKOPROFIL and where the ceramic covering is supposed to be limited. Press the BLANKE DEKOPROFIL with its fixing shank into the tile adhesive and adjust it. After that you firmly press in the tiles and adjust them in such way that the superior border of the profile is at the same level as the ceramic tile covering. (The profile is not to protrude compared to the tile, preferably to be 1mm lower). Attention: The tiles need to be installed without any air inclusions. Please leave a joint of 1,5 mm between BLANKE DEKOPROFIL and the tile. The joint between the tiles and towards the profile is to be filled in completely with grout mortar.

Attention: The proper and successful application of our products is outside our control. Therefore, we can only guarantee the quality of our products within the scope of our terms and conditions. However, we cannot be held responsible for the successful application of our product. This data sheet shall render all previous technical information about this product invalid. We reserve the right to changes based on technical advancements. Information that exceed the scope of this bulletin and is provided by our staff, requires our written confirmation.

#### Blanke Systems GmbH & Co. KG

Stenglingser Weg 68-70  
58642 Iserlohn/Germany

T +49 (0)2374 507-0  
F +49 (0)2374 507-4230

E info@blanke-systems.de  
I www.blanke-systems.de

Verfasser: AWT 02.05.2013