





FÜR HANDWERK, DAS ÜBERZEUGT.

TECHNICAL DATA SHEET

BLANKE AQUA-KEIL GLASS

The unique gradient profile for linear drainage systems

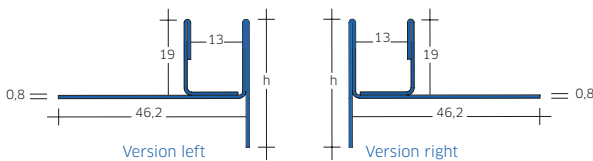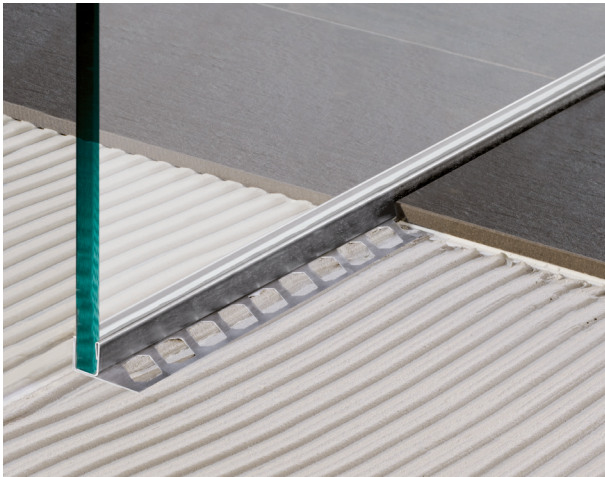

Characteristics

- > Easy to install - slope of 2% included
- > Install and fix a levelled partition wall of glass
- > Decorative
- > Saves time

Description

Blanke AQUA-KEIL GLASS is a gradient profile in stainless steel for a slope of 2 % which can be used as an optical access for linear drainage and offers the feature to install and fix a partition wall of glass. BLANKE AQUA-KEIL GLASS is available in left and right versions.

Application area

Blanke AQUA-KEIL GLASS is usable for installing levelled partition walls of glass and also to connect gradient areas and levelled floorings for accessible showers where a linear drainage system is used.

Technical Data

Length:	0,98 m
Height:	H1: 19 mm H2: 34,0 mm
Length:	1,20 m
Height:	H1: 19 mm H2: 37,0 mm
Length:	1,48 m
Height:	H1: 19 mm H2: 42,0 mm
Length:	2,00 m
Height:	H1: 19 mm H2: 60,0 mm
Appliance of the partition of wall:	until 12 mm
Profile strength:	0,8 mm
Setting leg:	30,0 mm
Material:	Stainless steel V2A brushed Stainless steel V2A satin
Versions:	right left
Slope:	ca. 2 %
Raw material:	1.4301

Working instructions

Press in the perforated setting leg of BLANKE AQUA-KEIL GLASS into the fresh adhesive bed and bring it into the correct position. Then press in the next tiles which have to be moved into to right position so that the profile is flushing with the tiles. Please observe that the tiles have to be layed without any hollows next to the profile. There should be a gap next to the tile of ca. 5,0 mm. The gab has to be filled in completely with silicone. In case that the profile has to be cutted do it always at the highest point. For cleaning the stainless steel do not use any steel wool or steel brush. Thereby extraneous rust could occur. Any cleaning agents must not contain hydrochloric acid or chlorine. The partition wall of glass can be insert into the appliance for the profile and has to be sealed. Attention: There must not be any contact between the glass and the stainless steel. Therefore, please use able spacer. The gap between the glass and the appliance for the profile has to be filled in with silicone.

Attention: he proper and successful application of our products is outside our control. Therefore, we can only guarantee the quality of our products within the scope of our terms and conditions. However, we cannot be held responsible for the successful application of our product. This data sheet shall render all previous technical information about this product invalid. We reserve the right to changes based on technical advancements. Information that exceed the scope of this bulletin and is provided by our staff, requires our written confirmation.

Blanke Systems GmbH & Co. KG

Stenglingser Weg 68-70
58642 Iserlohn/Germany

T +49 (0)2374 507-0
F +49 (0)2374 507-4230

E info@blanke-systems.de
I www.blanke-systems.de

Verfasser: AWT 02.05.2013