



FÜR HANDWERK, DAS ÜBERZEUGT.

CLEANING INSTRUCTIONS

Cleaning instructions for BLANKE LINEAR DRAINAGE UNITS:
BLANKE DIBA-LINE 2.0 and BLANKE DISK-LINE
BLANKE DIBA-LINE EC and BLANKE DISK-LINE EC
BLANKE DIBA-LINE SL and BLANKE DISK-LINE SL



General information

Limescale from water, hair, skin particles, soap, shower gel and shampoo contribute that soiling in the channel and drain area arises with daily use of the shower. This soiling can be removed as necessary. For convenience, household, non-aggressive or non-abrasive cleaning products can be used. These must not contain any solvents or acids. Furthermore, the grate covers must not be cleaned with steel wool or wire brushes.





FÜR HANDWERK, DAS ÜBERZEUGT.


CLEANING INSTRUCTIONS

Cleaning instructions for BLANKE LINEAR DRAINAGE UNITS

BLANKE DIBA-LINE 2.0 and BLANKE DISK-LINE



1 The grate cover is raised and lifted out using the grate lifter (white plastic lever) included in the scope of delivery.

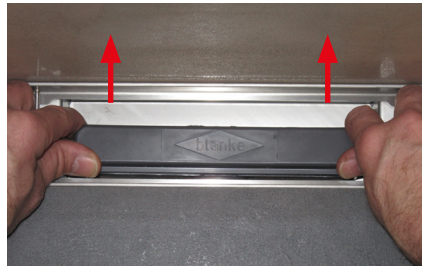

2 Grip the siphon on both sides and press it out of the drain connection; this is towards the wall or away from the wall depending on the installation situation.




3 Remove coarse soiling in the channel body with flowing warm water and household cleaning products. A sponge or a brush is helpful here. The same procedure has to be applied on the siphon. Grease the insertion connector of the siphon prior to reinstallation (e.g. with fitting grease or Vaseline).

BLANKE DIBA-LINE EC and BLANKE DISK-LINE EC



1 The grate cover is raised and lifted out using the grate lifter (white plastic lever) included in the scope of delivery.

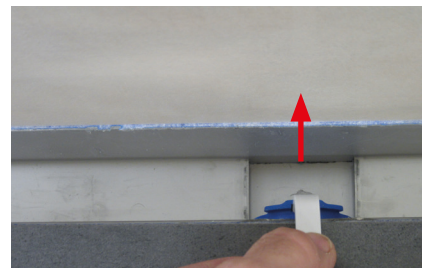


2 Push the grate lifter up into the groove of the drain connection nozzle and press it out; this is towards the wall or away from the wall depending on the installation situation.



3 Remove coarse soiling in the channel body with flowing warm water and household cleaning products. A sponge or a brush is helpful here. The same procedure has to be applied on the drain connection nozzle. Grease the sealing ring of the drain connection nozzle prior to reinstallation (e.g. with fitting grease or Vaseline).

BLANKE DIBA-LINE SL and BLANKE DISK-LINE SL

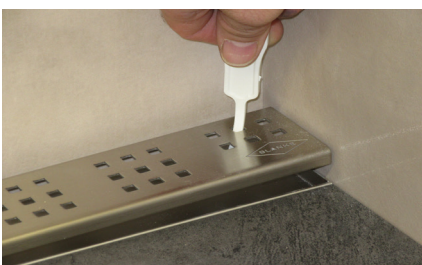

1 The grate cover is raised and lifted out using the grate lifter (white plastic lever) included in the scope of delivery.



2 Remove the hair sieve by hand.



3 Remove coarse soiling in the channel body with flowing warm water and household cleaning products. A sponge or a brush is helpful here. The same procedure has to be applied on the hair sieve. Rinse the drain with plenty of water prior to reinstallation.

Attention: During installation please refer to the notes in our latest technical data sheets. All work must also be carried out in compliance with current industrial standards.

Blanke Systems GmbH & Co. KG

Stenglingser Weg 68-70
58642 Iserlohn/Germany

T +49 2374 507-0
F +49 2374 507-4230

E info@blanke-systems.de
I www.blanke-systems.de

Author: AWT 18.01.2018
Page 2 of 2